



texas controls

MK35 SERIES

Designed for very heavy torque work in manufacturing plants



MK35-I


It allows the use of several wrenches simultaneously

This unit allows a much faster tightening operation than standard units on the market.

SINGLE HYDRAULIC UNIT

Key Attribute

- + Automatic or semiautomatic mode.
- + Max. pressure 800 bar.
- + PLC controlled: Allows the pump to be integrated into complex systems and precise automatic execution of algorithms.
- + HMI devices: Display on the front panel, to allow the user to configure the main parameters of the equipment.
- + Extra strong ventilation: Designed for high ambient temperatures.
- + Ultra high speed. High flow unit, accumulation pressure flow: 2.5 l/min at 800 bar on each motor.
- + Emergency stop push button.
- + Detachable remote control pendant.
- + Additional compressed air connector.
- + Top Tray: Protected with rubber. Ideal for storing tools.

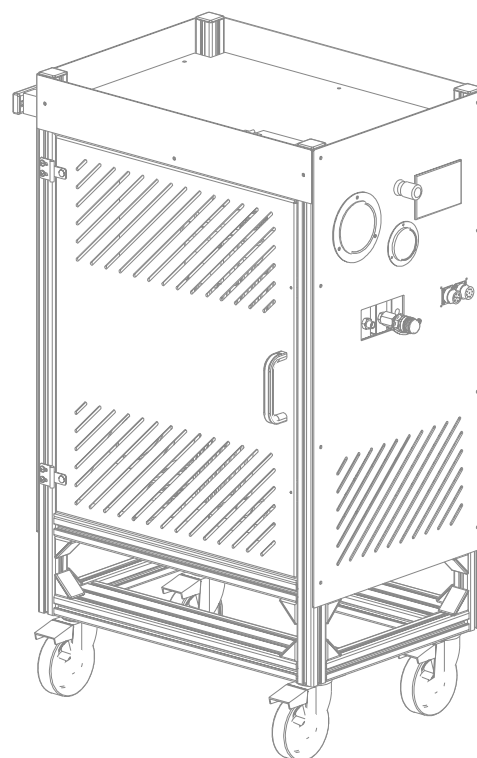

MK35-II

Plug
& Play



**Remote
Control**

Two Pendants
to control Dual Pumps

DOUBLE HYDRAULIC UNIT

